




Bearings International Co., Ltd

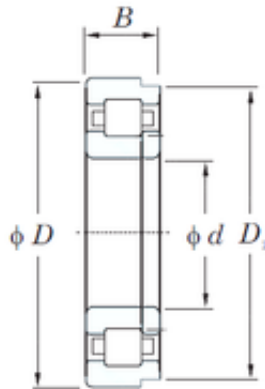

KOYO NUP213R cylindrical roller bearings

Bearing No. NUP213R

| | |
|-------------------------------|--------------|
| Size | 65x120x23 mm |
| Bore Diameter | 65 mm |
| Outer Diameter | 120 mm |
| Width | 23 mm |
| d | 65 mm |
| Fw | 78.5 mm |
| D | 120 mm |
| B | 23 mm |
| C | 23 mm |
| r min. | 1.5 mm |
| r1 min. | 1.5 mm |
| Weight | 1.05 Kg |
| Basic dynamic load rating (C) | 108 kN |
| Basic static load rating (C0) | 119 kN |
| (Grease) Lubrication Speed | 5300 r/min |
| Bearing No. | NUP213R |
| r(min) | 1.5 |
| r1(min) | 1.5 |
| Cr | 134 |
| C0r | 119 |
| Cu | 16.1 |
| Grease lub. | 5300 |
| Oil lub. | 6400 |
| Ew | - |
| d1 | - |
| B1 | - |

NUP213R Bearing 2D drawings and 3D CAD models



Bearings International Co., Ltd

| | |
|-------------------|------|
| B2 | - |
| da(min) | 73 |
| db(min) | 73 |
| db(max) | 77 |
| dc(min) | - |
| dd(min) | - |
| Da(max) | 112 |
| Db(max) | - |
| Db(min) | - |
| ra(max) | 1.5 |
| rb(max) | 1.5 |
| (Refer.) Mass(kg) | 1.11 |